

SmartReader Plus 3

Product Specifications

Type: Eight-Channel AC Current and Voltage

GENERAL SPECIFICATIONS

Size: 107 mm x 74 mm x 22 mm (4.2" x 2.9" x 0.9")
Weight: 110 grams (3.75 ounces)
Case Material: Noryl® plastic
Battery: 3.6 volt Lithium
Resolution: 12-bit (1 part in 4096)
Mounting: Magnetic backing or locking eyelet
Clock Accuracy: +/- 2 seconds per day
Sampling Methods: Continuous (First-in, First-out)*, Stop When Full (Fill-then-stop)
**Not available with sample rates faster than eight seconds*
Operating Limits: -40 to 70°C (-40 to 158°F) and 0 to 95% RH (non-condensing)
PC Requirements: IBM PC or 100% compatible with at least one free serial port, 2 MB of RAM memory, and 2 MB of hard disk space
Software Requirements: TrendReader® 2 (compatible with Windows® 2000, and XP)

Memory Size: 32KB (capable of storing up to 21,500 readings)
(3 models available) 128KB (capable of storing up to 87,000 readings)
 1.5MB (capable of storing up to 1,048,000 readings)
Sampling Rates: User selectable rates from 25 per second to every eight hours
(BP-101 battery pack or PS-201 power supply required for sampling rates faster than eight seconds)
Number of Channels: Eight (one for internal temperature, four for AC current and three 0-5 VDC inputs for use with ACR's voltage transducer to monitor 3-phase voltage)


SENSOR SPECIFICATIONS

Temperature Sensor (internal) NTC Thermistor - 10,000 Ohm @ 25°C (77°F)
Range: -40 to 70°C (-40 to 158°F)
Accuracy: +/- 0.2°C over the range of 0 to 70°C (+/- 0.3°F over the range of 32 to 158°F)
Resolution: 0.03°C (0.05°F) @ 25°C; better than 0.07°C (0.12°F) between -25 and 70°C (-13° and 158°F); better than 0.13°C (0.23°F) between -40 and -25°C (-40°F and -13°F)

Current Sensors	Range	Cat#
A60FL (60 Hz)	5, 25, 100, 250 Amps	35-0004
A65FL (50 Hz)	5, 25, 100, 250 Amps	35-0006
A70FL (60 Hz)	10, 50, 250, 500 Amps	35-0005
A75FL (50 Hz)	10, 50, 250, 500 Amps	35-0007

Nominal Voltage Ranges: **Accuracy:**
 120V (1 phase, 60Hz) Current channels: +/- 3.0% of full scale above 10% of range
 480V (3 phase, 60Hz) Voltage channels: +/- 0.5% of full scale

The SmartReader Plus 3 easily and accurately records AC current and voltage. Simply connect the logger to ACR's current probes (which are clamped around the power leads) and voltage transducer and begin recording. From this data, you can also determine energy consumption (kWh) with TrendReader® Standard software.

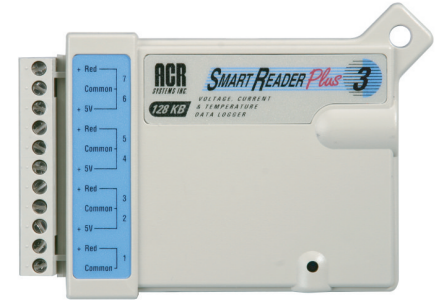

WARRANTY

Internal Battery: 10 Years
Data Logger: 3 Years

APPLICATIONS

Determining energy consumption, monitoring 3-phase voltage and current, start-up or long-term load analysis, demand side management, electric motor maintenance scheduling, etc.

Model#:	Cat#:
SRP-003	01-0010
SRP-003-128K	01-0114
SRP-003-1.5M	01-0143